



| REV | DESCRIPTION | DATE |
|-----|-------------|------|
| A | | |

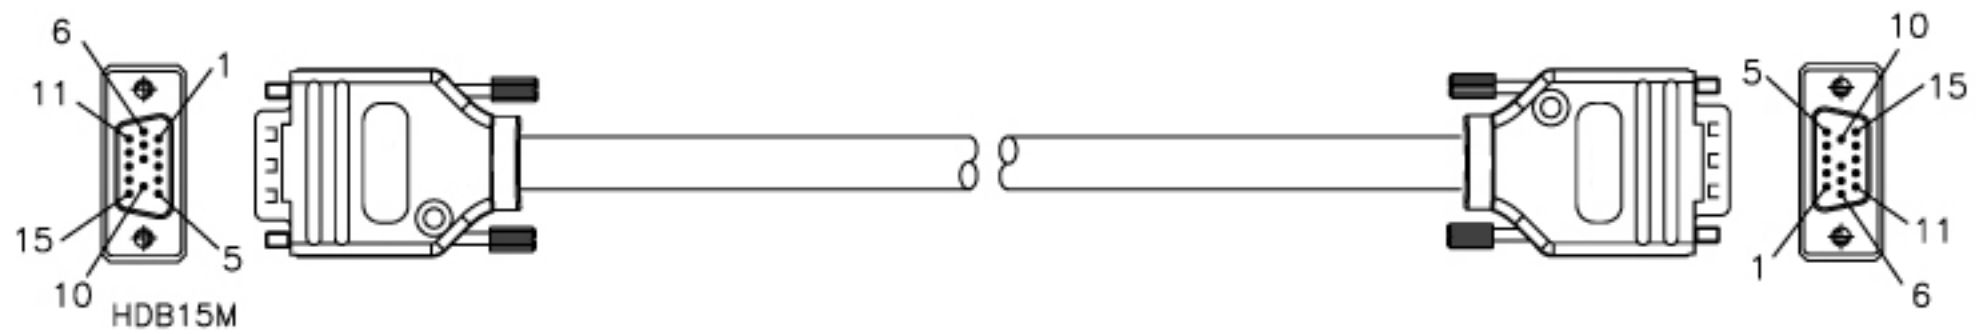

NOTE:

Bulk cable body specification:
 CVD-3800
 26 AWG mini high resolution coax
 (UL) rated CL2P, CSA rated CMP
 DCR: 41 Ω per 1000 feet
 Capacitance: 16.0 pF per foot
 Voltage: 150 Volts RMS
 Impedance: 75 Ω Nom.
 Temperature: -0°C to 75°C
 VOP: 83%

| ATTENUATION | |
|-------------|----------|
| MHz | dB/100ft |
| 1 | 0.60 |
| 3.58 | 1.12 |
| 10 | 1.90 |
| 71.5 | 4.80 |
| 100 | 5.10 |
| 135 | 7.10 |
| 200 | 7.40 |
| 400 | 11.80 |
| 1000 | 21.40 |

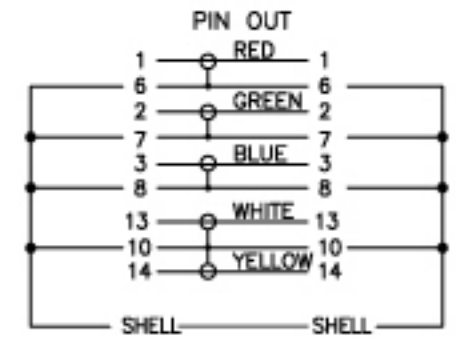

XX - Available in Different Length

Homeavcables.com

| | | | | |
|--|-------|------------|----------------------------------|-----|
| | | UNIT: mm | TITLE | |
| SCALE | | NONE | Plenum D-Series VGA Interconnect | |
| UNLESS OTHERWISE SPECIFIED TOLERANCES: | | P/N: | | DR. |
| x ±x xx ±xx xxx ±xxx ANGLE ± | | 33052-xxPX | | CH. |
| REV. | SHEET | DWG.NO: | AP. | |
| A | 1/1 | | | |